

Norsat X band PLL / External Reference LNB Series



Norsat XT1000H Series



Your Trusted Source for Satellite Equipment

Noise figure	0.7 dB
L.O. stability	±10 kHz in PLL mode if no 10MHz Ext. Ref. present
Phase noise (SSB)	-75 dBc/Hz at 1 kHz -85 dBc/Hz at 10 kHz -95 dBc/Hz at 100 kHz
Input VSWR	2.0 : 1
Output VSWR	2.0 : 1


Conversion gain	60 dB
Output P1dB	10 dBm
Power requirements	+15 to +24 V supplied through center conductor of IF cable
Current drain	270 mA
Input Waveguide	WR112
Dimensions	137 (L) x 70 (W) x 59 (H) mm (5.4 x 2.8 x 2.3 in)
Weight	600 g / 21.1 oz
Temperature Range	-40°C to +60°C
External Ref Frequency	10 Mhz (sine wave) -10 to 0 ohm

FREQUENCY BANDS AVAILABLE


Input frequency (GHz)	7.25 to 7.75
L.O. frequency (GHz)	6.30
Output frequency (MHz)	950 to 1450

HOW TO ORDER

XT1000HN

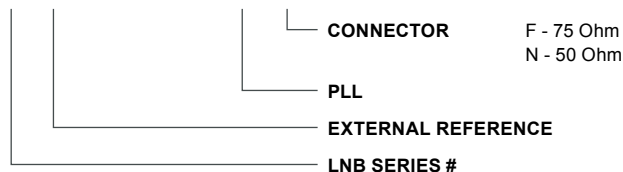

MECHANICAL DIAGRAM

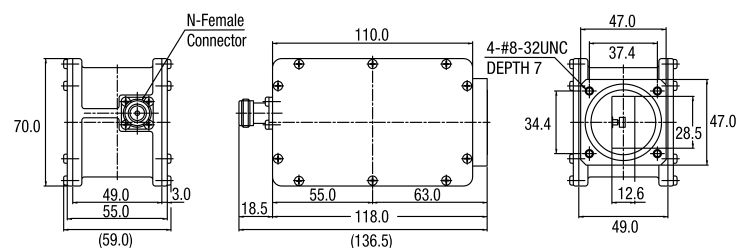

LNB-Norsat XT1000H Series_REV002
Specifications are subject to change without notice

sales@vikingsatcom.com • www.vikingsatcom.com

T: 517.629.3000 • F: 517.629.2379 • 704 North Clark Street • Albion, MI