



Ku (Mid) Band Receive Filter



Model 18114

Used for Ku-(mid) band receive applications, this bandpass filter fully rejects the transmit band (**above**) and virtually all undesired transmissions (**below**) the receive band.

- Ideal for **YAHSAT** and other Ku-(mid)band Receive Applications.
- Alternate Flange Configurations are Available Upon Request

Specifications:

Passband:	11.70 - 12.25 GHz (Ku-Mid Receive Band)
Insertion Loss:	0.25 dB Typ
VSWR:	1.20:1 Typ
Rejection:	65 dB Typ, 60 dB Min from 12.75 - 14.50 GHz (Ku-Low & Universal Transmit Band)
	50 dB Typ @ 11.43 GHz
Flanges:	WR75 Cover
Dimensions:	7.00" x 1.5" x 1.5" (178mm x 38mm x 38mm)
Finish:	White Lacquer

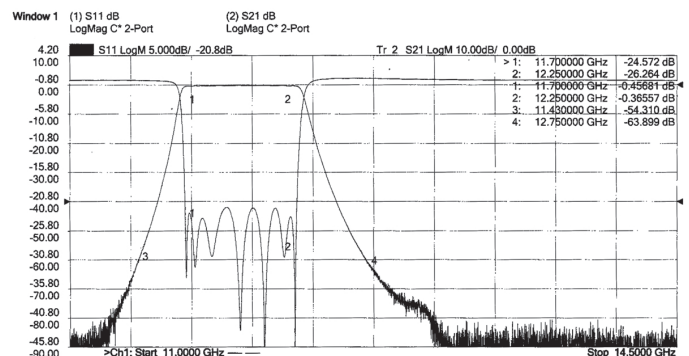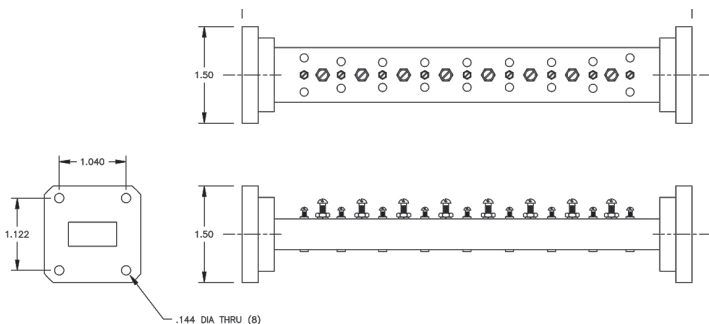

MICROWAVE FILTER CO., INC.
 6743 KINNE STREET, E. SYRACUSE, NY 13057
 E-Mail: mfcsales@microwavefilter.com

800-448-1666 • 315-438-4700
 Web: www.microwavefilter.com