



Norsat
International Inc.

Innovative Communication Solutions

LNB C-BAND 5000I PLL



FEATURES


Ideal for DBV (Digital Broadcast Video), VSAT Broadband, Military Satcom, Point-of-Sale, and Oil and Gas applications

- LO Stability +/- 50 kHz to +/-100 kHz
- 15 K noise temperature
- 580 grams / 20.5 ounces

FREQUENCY BANDS AVAILABLE

Input frequency (GHz)	4.5 - 4.8 GHz
L.O. frequency (GHz)	5.95 GHz
Output frequency (MHz)	1150 - 1450 MHz

MECHANICAL DIAGRAM

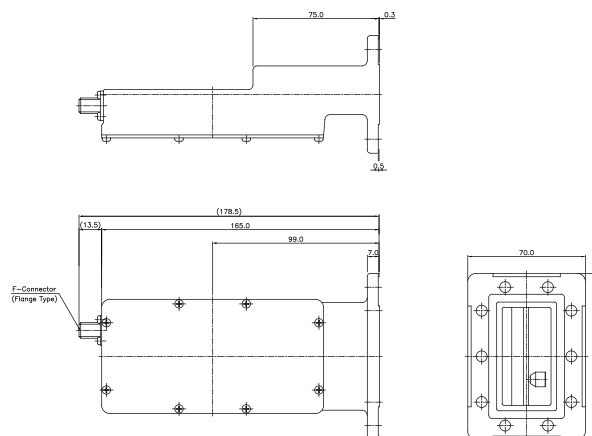

HOW TO ORDER

5500IF	CONNECTOR	F - 75 Ohm N - 50 Ohm
	L.O. STABILITY	5 - ±50 kHz 7 - ±75 kHz 1 - ±100 kHz
	LNB SERIES #	

