


# Ka System 17.30-22.30 GHz Quad

## Key features

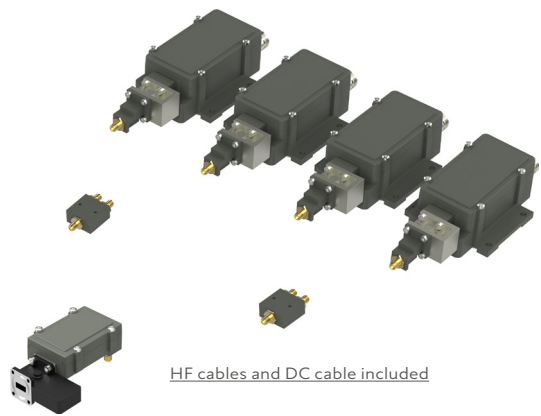

HF cables and DC cable included

- Auto LO ref Ext. 10 MHz, fallback to Internal ref
- Full Ka Receive band coverage
- High P1dB and IP3
- Excellent Phase noise meets all profiles of DVB-S2X.
- Customized LO as option
- Alarm and Monitoring & Control as option




### Description

The Ka-Band Quad System provides full coverage of the Ka receive band. The system consists of Ka LNA Wide-band with waveguide isolator, Ka BDC's with waveguide isolators and matched HF cables. Excellent Phase Noise to support all profiles of DVB-S2X services.

Options include customized LO, customized frequency ranges, customized gain, separate DC power input and separate input for the external 10 MHz reference. As an option the SMW M&C interface provides possibility to daisychain several units in one Modbus RTU RS485 network for the optional Alarm and Monitoring & Control functionality.


BDC connector (standard)

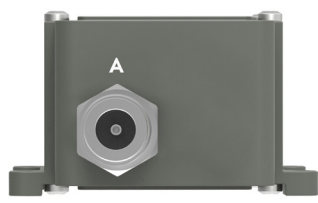

**Connector A (standard)**

Type: N-f, (option F-f or SMA-f)  
Functions: L-Band out, DC in, External 10 MHz in

BDC connectors (optional)

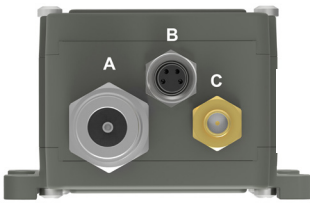

**Connector B (optional)**

Type: M8 female, 4 pin, A-coded  
Functions: Alarm and M&C

Connector B (optional)



- 1 = Alarm open collector (max. 200 mA) or optionally DC input.
- 2 = A pos+ RS485
- 3 = B neg- RS485
- 4 = Common (GND)
- 5 = Shield

**Connector C (optional)**

Type: SMA-f only  
Functions: Ext. 10 MHz in and/or DC input

Explore our full product range in this category

# Ka System 17.30-22.30 GHz Quad

## Technical specifications

MODEL		17.30 - 22.30 GHz			
INPUT	Input frequency	BDC 1: 17.30-18.55 GHz	BDC 2: 18.55-19.80 GHz	BDC 3: 19.80-21.05 GHz	BDC 4: 21.05-22.30 GHz
	LO frequency	BDC 1: 16.35 GHz	BDC 2: 17.60 GHz	BDC 3: 18.85 GHz	BDC 4: 20.10 GHz
	Input LNA	Waveguide WR 42 / R 220. Flange PBR 220.			
	Input BDC	SMA female 50Ω			
	DC Input BDC	+12 to +24 V through output connector or separate SMA connector (optional), power consumption 5W typ.			
	DC input LNA	+12 to +24 V / 110 mA typ. Supplied through separate SMA connector via included DC cable, mated from BDC # 1			
	Input VSWR LNA	1.35:1 max. with Isolator (included)			
INTERNAL	LO ref.	Auto LO ref. External 10 MHz ref / Internal ±2.5 ppm -40 to +80°C			
	External LO ref.	Sine wave, Level -10 to +10 dBm. Supplied through output connector.			
	LO Leakage	-60 dBm max. @ RF input			
	Gain	60 dB typ. (55dB min.)			
	Flatness	±0.4 dB within 30 MHz, ±2 dB max. over each band			
	Noise figure	1.8 dB / 149 K typ.			
	Group Delay	±1 ns max.			
	Phase Noise	-35 dBc @ 10 Hz   -65 dBc @ 100 Hz   -80 dBc @ 1 kHz   -85 dBc @ 10 kHz   -95 dBc @ 100 kHz   -112 dBc @ >1 MHz typ.			
OUTPUT	Image Rejection	30 dB min.			
	IF output	950-1950 MHz, (950-2250 MHz optional)			
	Output P1dB	+ 15 dBm			
	Output IP3	+ 25 dBm			
	Output VSWR BDC	1.7:1 typ.			
	Output connector LNA	SMA-type 50Ω			
GENERAL	Output Connector BDC	N-type 50Ω , SMA-type 50Ω or F-type 75Ω			
	Alarm (option)	Sum alarm, set via M&C to alarm in any combination of: LNA failure, Total current, LO lock (Ext/Int/n/a), signal power high/low, Supply voltage low. Open collector 3.3 to 28 V, max. 200 mA (pull-up 10 k Ohm at host side), pin 1 in M8 connector.			
	M & C (option)	Via MODBUS RTU RS485 electrical interface, see document <a href="#">Monitoring and Control technical interface</a> for details. NOTE! Mates with M8 male connector/Cable, use only shielded CAT 5 cables			
	System power consumption	23 W max.			
	MTBF	MTBF as per MIL-HDBK-217F Notice 2: Environmental Condition GF (Ground Fixed): >690000 hours, Environmental Condition AIC (Airborne, Inhabited, Cargo): >360000 hour, Quality level: Commercial, Temperature used for MTBF calculation: +35°C Ambient			
	Dimensions LNA	103 x 63 x 34 mm, including isolator			
	Dimensions BDC	178 x 80 x 46 mm (F- & SMA-connector)   184 x 80 x 46 mm (N-connector) ( for drawing, see <a href="http://www.smw.se">www.smw.se</a> )			
	Weight LNA	160 including isolator			
	Weight BDC	399 g (F- & SMA-connector)   418 g (N-connector)			
	Temperature range	Storage and operating: -40 to +80°C, -40 to +176°F			
OPTIONS		- Separate SMA connector on BDC for DC input or Ext. 10 MHz reference - Alarm and Monitoring & Control - Customized gain - Customized LO - Extended IF			

# Ka System 17.30-22.30 GHz Quad

## Example and wiring diagram

Example Ka-Band QUAD System configurations					
P/N (x = connector type F, N or SMA)	Frequency range (GHz)	BDC	LO	Ka-band (GHz)	L-band (MHz)
55769x-V02 Auto LO ref. Ext. 10 MHz/Int.±2.5 ppm	17.20 - 21.20	1	16.25	17.20-18.20	950-1950
		2	18.25	19.20-20.20	950-1950
		3	17.25	18.20-19.20	950-1950
		4	19.25	20.20-21.20	950-1950
55771x-V02 Auto LO ref. Ext. 10 MHz/Int.±2.5 ppm	17.30 - 22.10	1	16.35	17.30-18.50	950-2150
		2	18.75	19.70-20.90	950-2150
		3	17.55	18.50-19.70	950-2150
		4	19.95	20.90-22.10	950-2150
55772x-V02 Auto LO ref. Ext. 10 MHz/Int.±2.5 ppm	17.30 - 22.30	1	16.35	17.30-18.55	950-2200
		2	18.85	19.80-21.05	950-2200
		3	17.60	18.55-19.80	950-2200
		4	20.10	21.05-22.30	950-2200
55775x-V02 Auto LO ref. Ext. 10 MHz/Int.±2.5 ppm	17.70 - 21.20	1	16.75	17.70-18.60	950-1850
		2	17.65	18.60-19.50	950-1850
		3	18.55	19.50-20.40	950-1850
		4	19.45	20.40-21.20	950-1850
55776x-V02 Auto LO ref. Ext. 10 MHz/Int.±2.5 ppm	17.70 - 21.90	1	16.75	17.70-18.75	950-2000
		2	18.85	19.80-20.85	950-2000
		3	17.80	18.75-19.80	950-2000
		4	19.90	20.85-21.90	950-2000
55773x-V02 Auto LO ref. Ext. 10 MHz/Int.±2.5 ppm	17.70 - 21.70	1	16.75	17.70-18.90	950-2150
		2	19.15	20.10-20.90	950-1750
		3	17.95	18.90-20.10	950-2150
		4	19.95	20.90-21.70	950-1750
55783x-V02 Auto LO ref. Ext. 10 MHz/Int.±2.5 ppm	18.20 - 22.00	1	17.25	18.20-19.40	950-2150
		2	19.15	20.10-21.20	950-2050
		3	18.05	19.00-20.20	950-2150
		4	19.95	20.90-22.00	950-2050


**NOTE:**

x = 0 for F connector

x = 5 for N connector

x = 8 for SMA connector

### Ka Quad Band System

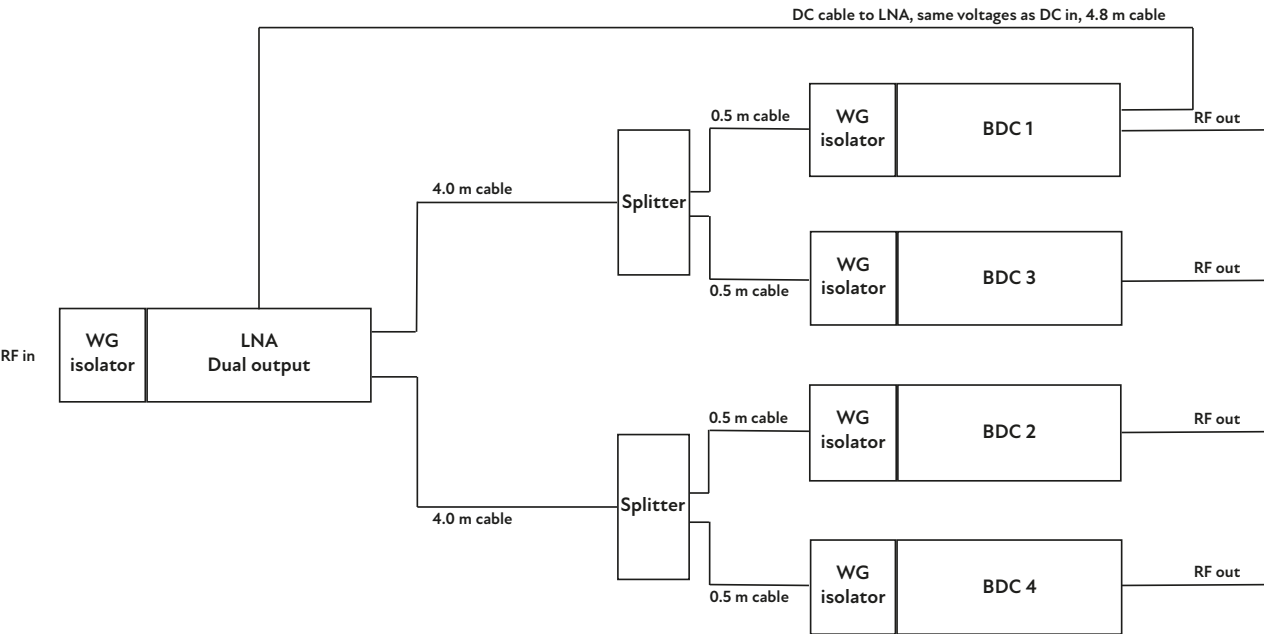

C-BAND

X-BAND

KU-BAND

KA-BAND

Q/V-BAND

RFo FIBER


L-BAND

EXT REF

OTHER

# Ka System 17.30-22.30 GHz Quad

## Technical Drawing

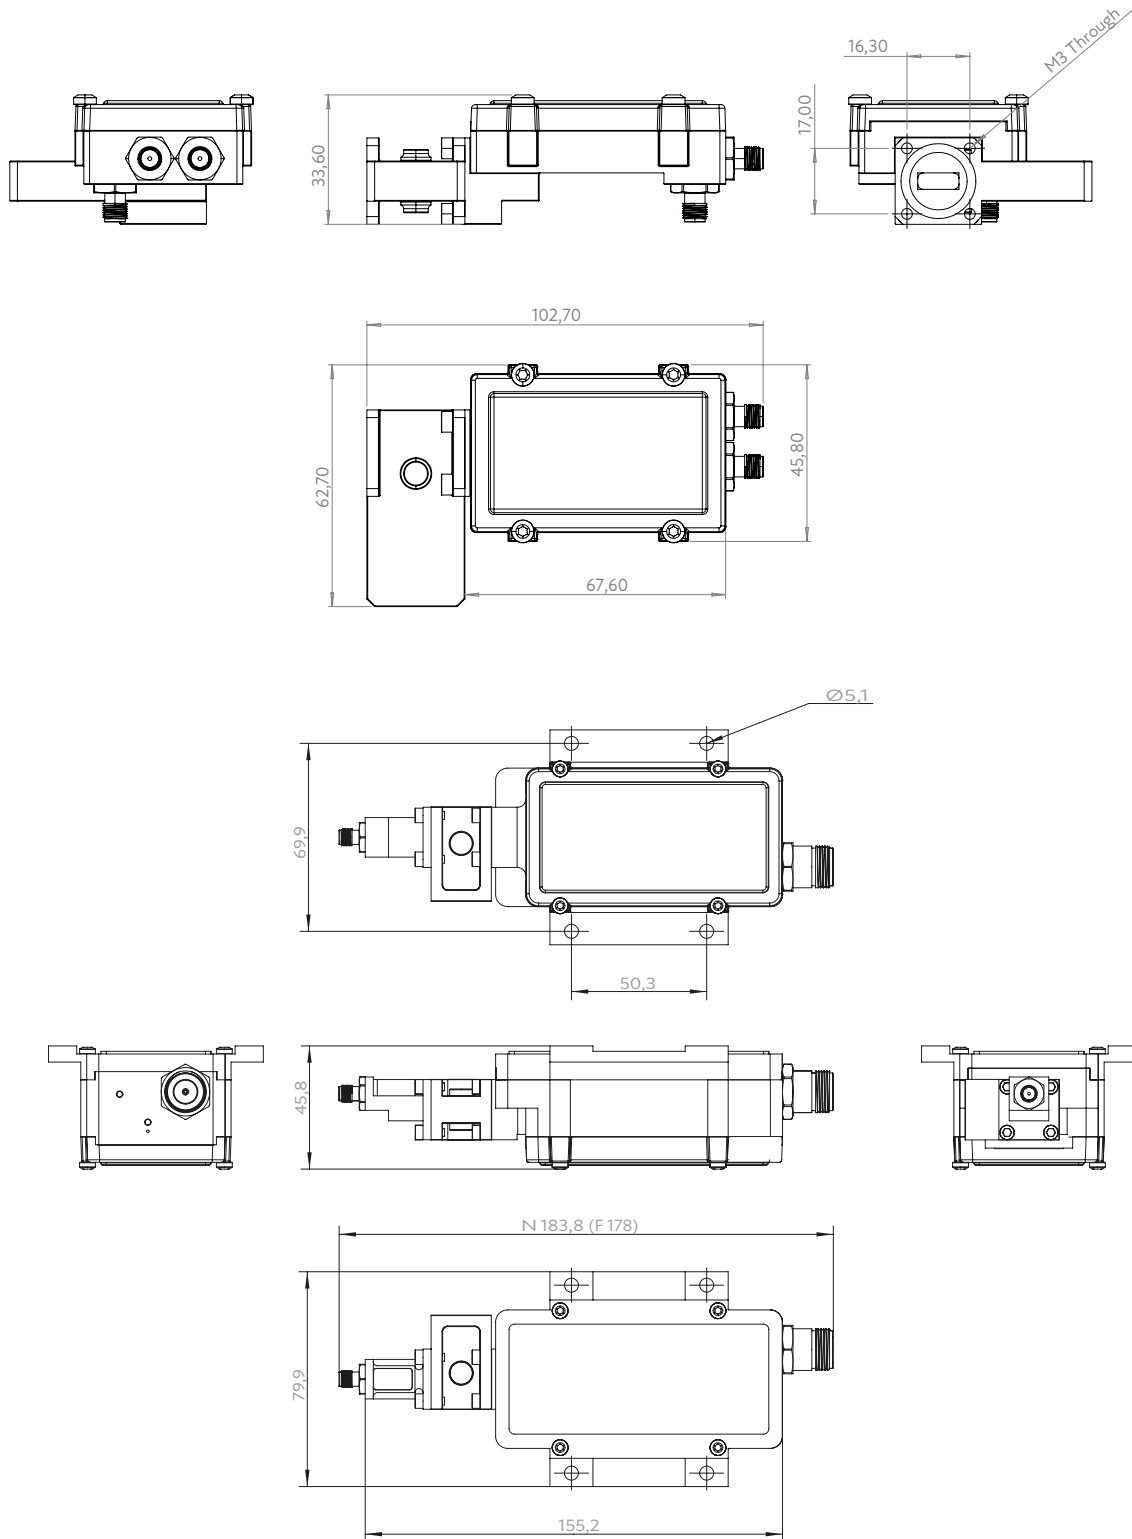

Designed and  
Manufactured  
  
IN SWEDEN

Professional Satcom Frequency Converters & Components. All products are fully CE and RoHS compliant and every unit includes full documentation of performance tests and quality control. Please contact [sales@smw.se](mailto:sales@smw.se) to configure or customize the unit to your needs. Visit [smw.se](http://smw.se) or scan QR code to see our full product range and request a quote.



**SMW**  
SWEDISH MICROWAVE AB

Technical specifications are typical, for specific part number specifications, please contact us. Specifications are subject to change without prior notice. Products from Swedish Microwave AB are made for commercial use.  
Swedish Microwave AB | Dynamovägen 5 | S-591 61 Motala | Sweden | Contact: +46 141 21 61 35 | [sales@smw.se](mailto:sales@smw.se) | [smw.se](http://smw.se)