

## ■ C-band LNA

MODEL No. **NJS8451/52**

## &lt; Features &gt;

- \* **Low Noise Temperature**  
• Noise Temperature: 15 K
- \* **Low DC Current Drain**  
• DC Current Drain: 125 mA
- \* **Small Size & Light Weight**  
• Weight: 800 g
- \* **RoHS Compliance**



## &lt; Line-Up &gt;

Model No.	RF Frequency	IF Connector	Power Supply
NJS8452	3.400 to 4.200 GHz (Palapa C-band)	N-type	+24 VDC (+12 to +28 VDC)
NJS8451	4.500 to 4.800 GHz (Insat C-band)		


## &lt; Specifications &gt;

Item	Specifications
Input Interface	Waveguide, CPR229 (with Groove)
Output Interface	N-type, female (50 ohm)
Noise Temperature (Ta.: +25 C)	15 K typ., 30 K max.
Linear Gain (Ta.: +25 C)	48 dB min., 55 dB max. [Model No.: NJS8452]
	55 dB min., 62 dB max. [Model No.: NJS8451]
Input V.S.W.R.	3.0 : 1 typ.
Output V.S.W.R.	2.0 : 1 max.
Power Requirement	+24 VDC (+12 to +28 VDC)
Current Drain	125mA typ., 160 mA max.
Temperature Range (ambient)	-40 to +60 C (operating), -40 to +80 C (storage)
Dimension & Housing ( without Interface Connectors )	80.8 mm (L) x 99.6 mm (W) x 76 mm (H) [3.18" (L) x 3.92" (W) x 2.99" (H)]
Weight	800 g [1.76 lbs]

# ■ C-band LNA

MODEL No. **NJS8451/52** series

## < Outline Drawing >

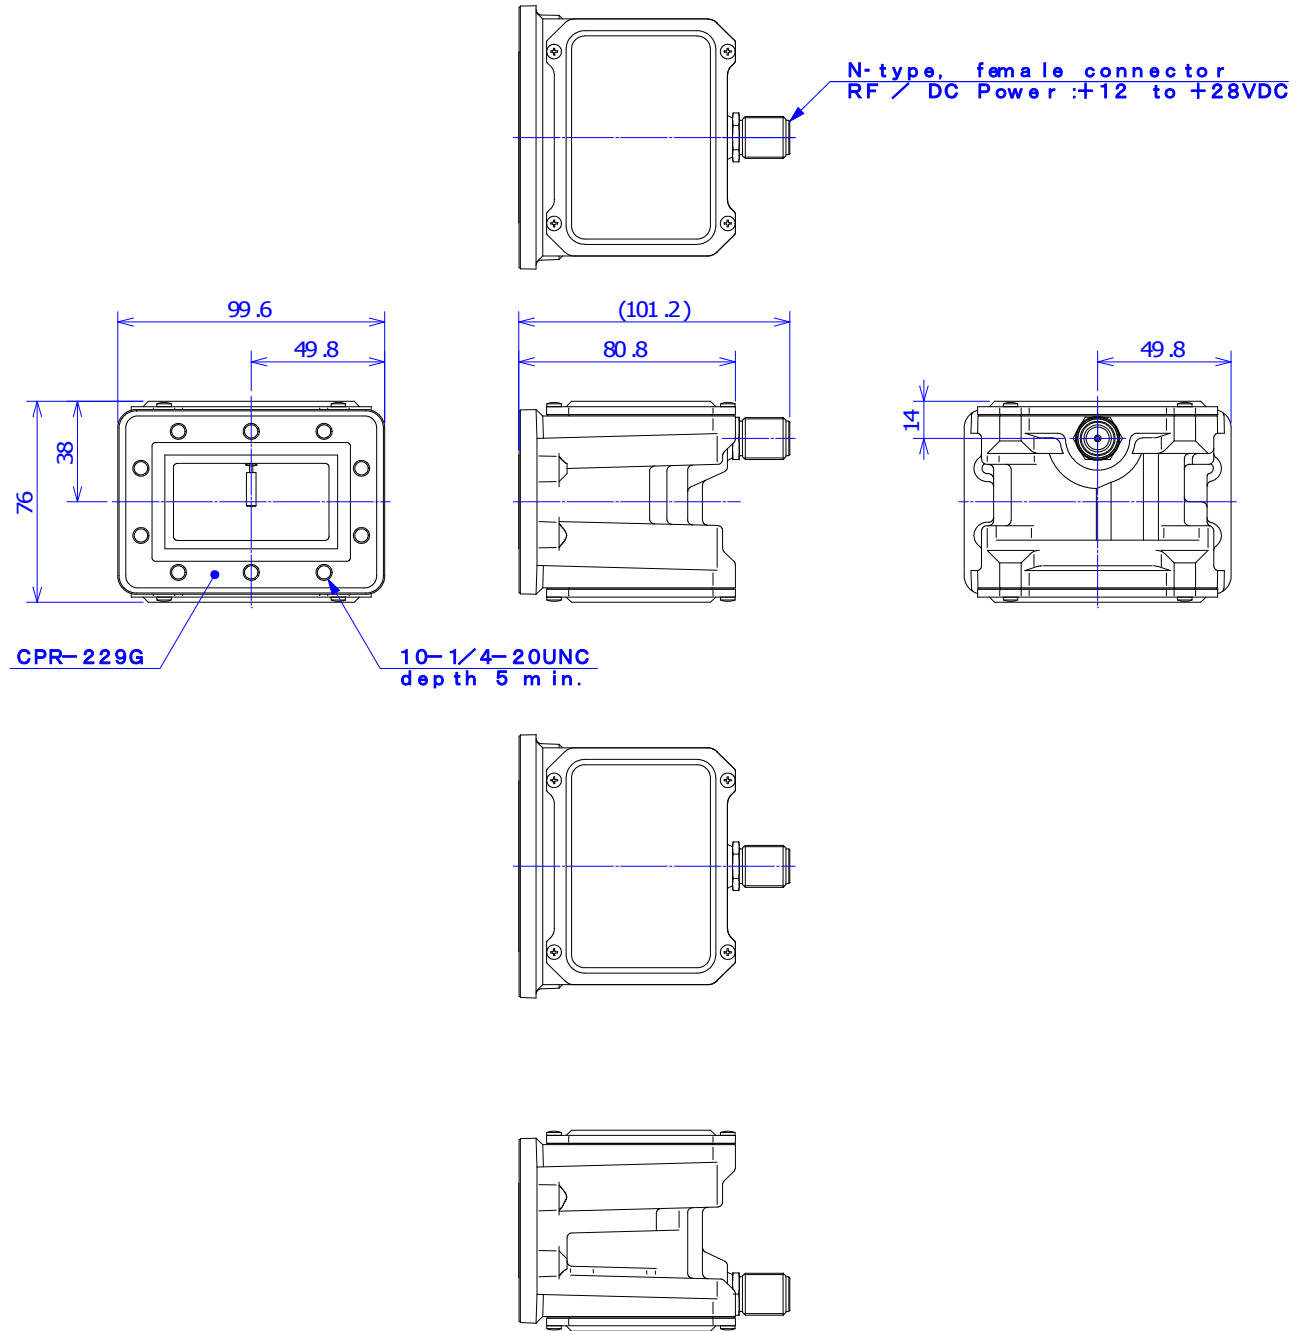

Unit: mm