

WAVEGUIDE TO TYPE N ADAPTER




Your Trusted Source for Satellite Equipment



ADP-WR75N

- **WR75 to Type N (ADP-WR75N)**
- **Adapt from coaxial to waveguide or vice versa**
- **Iridite / Corrosion protection treatment**

SPECIFICATIONS	ADP-WR75N
WR Size	75
Frequency (GHz)	10.0 – 15.0
Connector Style	N Female
Flange	Grooved
VSWR	1.25:1
Material	Brass
Finish	Black Flat (flanges are unpainted)
Dimension A (Max)	2.00
Dimension B	1.10
Dimension C	0.50

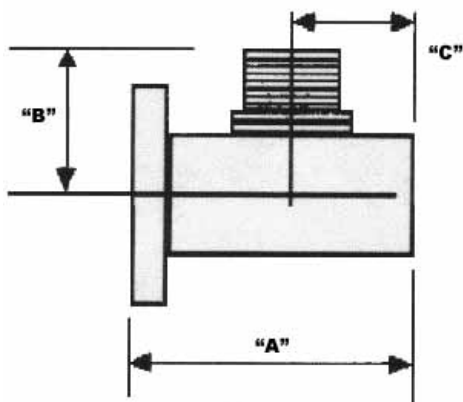

ADAPTERS_ADP-WR75N_REV004

Specifications are subject to change without notice