

Waveguide to Type N Adapter




Your Trusted Source for Satellite Equipment



ADP-WR229N

- C Band
- WR229 to Type N (ADP-WR229N)
- Adapt from Coaxial to Waveguide or Vice Versa
- Iridite/Corrosion Protection Treatment

Specifications	
WR Size	229
Frequency (GHz)	3.30 - 4.90
Connector Style	N Female
Flange	CPRG
VSWR	1.25:1 Max.
Material	Brass
Finish	Black Flat (Flanges Are Unpainted)
Dimension A (Max.)	2.75
Dimension B	1.37
Dimension C	0.76

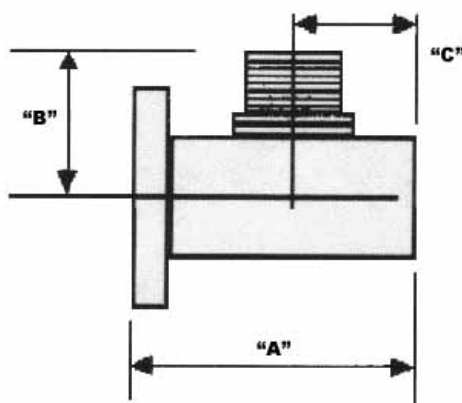

ADAPTERS_ADP_WR229N_REV002

Specifications are subject to change without notice

sales@vikingsatcom.com vikingsatcom.com T: 517-629-3000 F: 517-629-2379

704 North Clark Street Albion, Michigan 49224